
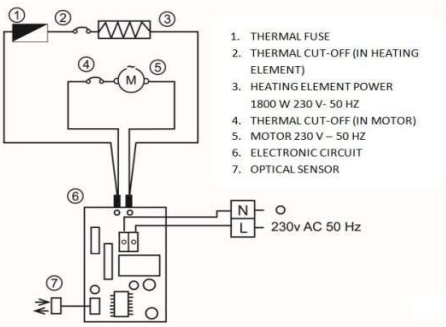




TECHNICAL DATA SHEET

NAME	REFERENCE
OPTICAL SENSOR OPERATED VITRIFIED HAND DRYER	AA94000
DESCRIPTION	
<p>HIGH QUALITY AND PERFORMANCE TRADITIONAL HAND DRYER</p> <p>DOUBLE ELECTRICAL INSULATION</p> <p>OPTICAL SENSOR OPERATED: ACTIVATES BY APPROACHING HANDS AND STOPS AUTOMATICALLY</p> <p>CLASS II: NO GROUNDING WIRE REQUIRED, AT 0,6 mts FROM WATER POINT</p> <p>HIGH QUALITY VITRIFIED STEEL</p>	
ELECTRICAL STEEL	
 <p>1. THERMAL FUSE 2. THERMAL CUT-OFF (IN HEATING ELEMENT) 3. HEATING ELEMENT POWER 1800 W 230 V - 50 HZ 4. THERMAL CUT-OFF (IN MOTOR) 5. MOTOR 230 V - 50 HZ 6. ELECTRONIC CIRCUIT 7. OPTICAL SENSOR</p>	EAN CODE 8427950323164

CHARACTERISTICS				
NET (without packaging)	DIMENSIONS (mm)	HEIGHT: 220	WIDTH: 280	DEPTH: 210
	WEIGHT (Kg)	4,385		
GROSS (with packaging)	DIMENSIONS (mm)	HEIGHT: 285	WIDTH: 345	DEPTH: 295
	WEIGHT (Kg)	5,085		
MATERIALS	STAMPED VITRIFIED STEEL COVER INTERNAL COMPONENTS IN POLYCARBONATE "V0" NOZZLE MADE OF NATURAL CHROME ABS			
COLOUR / FINISH	WHITE STAMPED VITRIFIED STEEL COVER CHROME NOZZLE			
ELECTRICAL FEATURES	<div> <p>VOLTAGE: 230V. AC</p> <p>FREQUENCY: 50 Hz.</p> <p>CONSUMPTION: 8,8 Amp.</p> <p>MOTOR POWER: 200 W.</p> <p>HEATING ELEMENT POWER: 1800 W.</p> <p>TOTAL POWER: 2000 W.</p> <p>MOTOR RPM: 4250</p> <p>TYPE OF MOTOR : BRUSHED</p> </div> <div> <p>AIRSPEED: 121 Km/HORA</p> <p>EFFICIENT AIRFLOW: 300 m³/HORA</p> <p>SOUND PRESSURE: 77,5 Db.</p> <p>AIR TEMPERATURE: 54,1 °C (At a distance of 10 cm.)</p> <p>ELECTRICAL INSULATION: CLASS II</p> <p>CERTIFICATIONS: TÜV, GS, UL AND CE</p> <p>PROTECTION RATIO: IP23</p> </div>			
FIXING	BY MEANS OF FOUR SCREWS AND FOUR WALL PLUGS - PROVIDED			
PACKAGING	SINGLE UNIT PACKAGING		Approved by : Quality Control Dept	
			DATE: 12/05/2015	